

AquaABF[®]

Automatic Backwash Filter



AQUA-AEROBIC SYSTEMS, INC.
A Metawater Company

AquaABF[®]

Automatic Backwash Filter

For more than 25 years, the AquaABF[®] Automatic Backwash Filter has received wide acclaim for its successful performance in municipal and industrial water and wastewater treatment. It has proven to be an efficient means of treating potable water, reducing turbidity and suspended solids in industrial process makeup water, and providing reuse quality effluent in municipal wastewater applications.

The AquaABF filter is a continuous rapid-rate, gravity filter utilizing granular media. The filter is simple to operate and offers a competitive cost and energy efficient design, making it the logical alternative to other filtration systems.

System Features and Advantages

- High quality effluent
- Mono media sand, dual media sand and anthracite, or granular activated carbon
- Continuous filtration, even during backwash
- High mechanical reliability and low maintenance; no pipe galleries or air bowers
- Fully automatic; minimal operator attention required
- Low capital cost and installation cost
- Low head requirements

Cast-in-Place Concrete Basins

AquaABF concrete filters are available in standard widths of 6, 9, 12.5, and 16 ft. (1.8, 2.7, 3.8 and 4.9 m), offering site adaptability and cost efficiency.



Four AquaABF[®] concrete filters installed as part of this plant's upgrade to meet required effluent TSS and phosphorus levels.

Steel Package Tanks

AquaABF package filters are available in a range of sizes from 4 ft. x 8 ft. (1.2 m x 2.4 m) to 9 ft. x 40 ft. (2.7 m x 12.2 m), and are available in both painted steel and stainless steel.



AquaABF[®] package filters are ideal for both municipal and industrial water or wastewater treatment applications.

AquaABF[®]


Operation

The AquaABF is designed to filter water and backwash filter cells simultaneously during normal operation. By design, the filter bed is divided horizontally into 8 in. or 12 in. (20.3 or 30.5 cm) wide cells. Inlet water floods the sand bed through multiple inlet ports via gravity and flows through the granular media and porous plate. Filtrate passes through the effluent backwash port and into the effluent channel.

Backwashing occurs under the hood, which is suspended below the traveling carriage. During backwash, the carriage and attached hood move slowly across the filter bed. This action consecutively isolates and backwashes each individual cell. Cells not under the hood continue the filtering process as the hood and carriage travel across the AquaABF filter bed. A backwash pump draws filtered water from the effluent chamber and backwashes each cell by pumping water back through the effluent port. Another pump picks up the washwater, which has collected in the hood and discharges it to the washwater trough. The backwash cycle occurs only when needed because of headloss, or if desired, by a pre-selected time cycle.

Turbilite[®] Backwash System Option

The Turbilite option collects the post-backwash filtrate and re-directs it to the washwater collection system. The system minimizes post-backwash breakthrough, maximizing turbidity and suspended solids removal; and reducing virus and other microorganisms often present in potable water and wastewater.

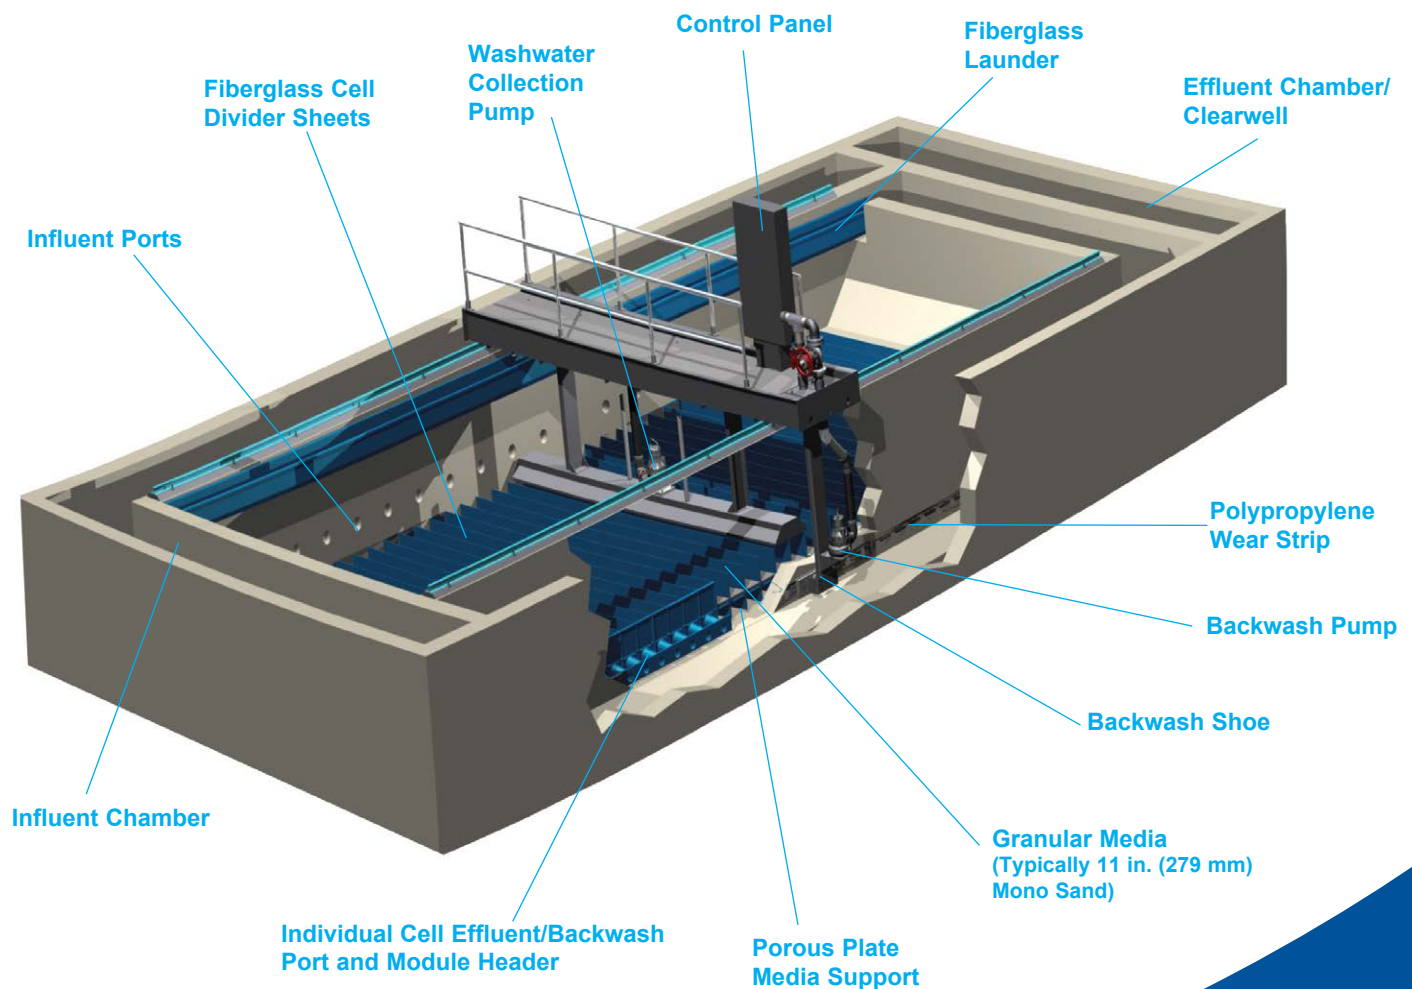

Since 1969, Aqua-Aerobic Systems, Inc. has led the industry by providing advanced solutions in water and wastewater treatment. As an applied engineering company serving both municipal and industrial customers, we work collaboratively with consulting engineers, owners, plant managers, and operators to design and manufacture the best treatment solution with the lowest lifecycle cost.

PROTECTING THE WORLD'S WATER.

Aeration and Mixing

Biological Processes

Filtration

PFAS Solutions

Ozone Systems

Membranes

Aftermarket Products and Services

Rental Programs

AquaABF[®] Automatic Backwash Filter

Visit our website at www.aqua-aerobic.com to learn more about the AquaABF[®] Automatic Backwash Filter and our complete line of products and services.



AQUA-AEROBIC SYSTEMS, INC.
A Metawater Company

www.aqua-aerobic.com
6306 N. Alpine Road, Loves Park, IL 61111-7655
p 815.654.2501 | f 815.654.2508 | solutions@aquaaerobic.com

The information contained herein relative to data, dimensions and recommendations as to size, power and assembly are for purpose of estimation only. These values should not be assumed to be universally applicable to specific design problems. Particular designs, installations and plants may call for specific requirements. Consult Aqua-Aerobic Systems, Inc. for exact recommendations or specific needs. Patents Apply.